


DY-MPTZ4XIR40



Modèle		DY-MPTZ4XIR40
Spécificités	Mini camera Bullet motorisée PTZ, AHD / CVI / TVI / CVBS zoom optique 4X autofocus, IR40M	
Sensor	1/3" Progressive scan CMOS	
Effective pixels	1080P	
Total pixels	2.4 Megapixels	
Objectif	4X optique zoom f=2.8-12mm	
Communication	COC, RS485, Pelco P/D	
Min. illumination	Couleur: 0.01 Lux \ N/B: 0 Lux	
BLC	Auto	
WB	Auto	
S/N Ratio	>50dB	
Horizontal Rotation Speed	25°/sec	
Horizontal Rotation Range	0°~160°	
Tilt Rotation Speed	20°/sec	
Tilt Rotation Range	0°~55°	
Preset Points	220	
Guard Tours	3 groups	
Operating température	extérieur: -30°~ +60°	
Menu OSD	Multiples langues	
IR distance	40 mètres (Array 42Mil 6pcs)	
Humidité	≤95% / IP66	
Power	DC12V ≤2A	
Consommation	< 10W	
Lightning Protection	voltage 3000V	
Poids et dimensions	0.55 KGS	
Normes	CE, FCC, RoHs	

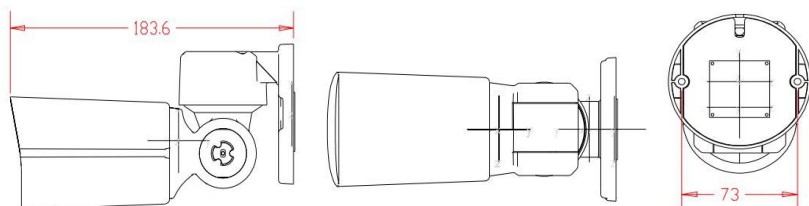

DYNAVISION

www.inv-technology.com